

## Development and Validation of Work Movement Task Analysis: Part 1

Mohd Zubairy Shamsudin<sup>1</sup>, Mohd Sharikh Dali Mahad<sup>2</sup>

Faculty of Biomedical and Health Sciences, Universiti Selangor (UNISEL)  
[mohdzubairy@unisel.edu.my](mailto:mohdzubairy@unisel.edu.my), [mohdsharikh@unisel.edu.my](mailto:mohdsharikh@unisel.edu.my)

**Abstract.** Work-related Musculoskeletal Disorder (WMSDs) is one of the occupational health problems encountered by workers over the world. In Malaysia, there is increasing in trend over the years, particularly in the manufacturing sectors. Current method to observe workplace WMSDs is self-report questionnaire, observation and direct measurement. Observational method is most frequently used by the researcher and practitioner because of the simplified, quick and versatile when it applies to the worksite. However, there are some limitations identified e.g. some approach does not cover a wide spectrum of biomechanics activity and not sufficiently sensitive to assess the actual risks. This paper elucidates the development of Work Movement Task Analysis (WMTA), which is an observational tool for industrial practitioners' especially untrained personnel to assess WMSDs risk factors and provide a basis for suitable intervention. First stage of the development protocol involved literature reviews, practitioner survey, tool validation and reliability. A total of six themes/comments were received in face validity stage. New revision of WMTA consisted of four sections of postural (neck, back, shoulder & arms and legs) and associated risk factors; movement, load, coupling and basic environmental factors (lighting, noise, odorless, heat and slippery floor). For inter-rater reliability study shows substantial agreement among rater with  $K = 0.70$ . Meanwhile, WMTA validation shows significant association between WMTA score and self-reported pain or discomfort for the back, shoulder&arms and knee&legs with  $p < 0.05$ . This tool is expected to provide new workplace ergonomic observational tool to assess WMSDs for the next stage of the case study.

**Keywords:** Biomechanics; Musculoskeletal Disorders; Assessment; Observational Tools

### 1. Introduction

Work-related Musculoskeletal Disorder (WMSDs) is one of the occupational health problems encountered by workers over the world. In Malaysia, there is increasing in trend over the years, particularly in the manufacturing sectors [1]. As an industrial developing country (IDC), Malaysian reliance most of the man powers in the job process to support civilization development. Main WMSDs risk factors in the workplace are awkward postures, repetitive movement and task duration mostly involved in manual material handling activity. Individual risk factors include age, gender, anthropometry, muscle strength and physical fitness [2].

Current technique to observe workplace WMSDs is self-report questionnaire, observation and direct measurement. Observational method is most frequently used by the researcher and practitioner because of the straightforward, quick and versatile when it applies to the worksite. However, there are some limitations identified e.g. approach does not cover a wide spectrum of biomechanics activity and not sufficiently sensitive to assess the actual risks. This research focuses on the development of Work Movement Task Analysis (WMTA) and explain about development and validation process. WMTA is designed for industrial practitioner especially untrained personnel to investigate WMSDs risk factors with employee engagement.

### 2. Materials & Methods

Development and evaluation of WMTA encompassed two stages (Phase I & Phase II). This paper only discusses the development of WMTA Phase I. Figure 1 shows the stages in the development process in sequent order.

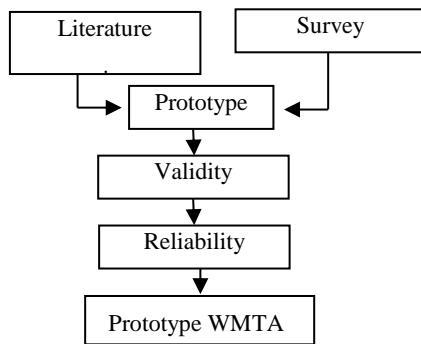


Fig. 1. Development process Phase I

Extensive literature review [3-22] conducted comprises current observational tools, physical and psychosocial risk factors and epidemiological evidence with regard WWMSDs.

Initial survey conducted among 16 OSH practitioners to find out the features of a suitable observational tool and their requirements for a new assessment tool. Based on their feedbacks, the first prototype is designed covered workspace environment risk factors, musculoskeletal risk factors and psychosocial risk factors.

Prototype WMTA extended to several reviewers appointed to examine face and content validity. The reviewers consists of occupational safety and health practitioners, university lecturers with occupational safety and health background and undergraduate student taking bachelor of occupational safety and health program. Some reviewers have extensive experience (between 10-20years) in the field of occupational safety and health. Comments from those highlighted to improve the prototype.

Pilot study was important to ensure the appropriateness of the prototype. Some sets of concerns are to identify the clarity of the items contained and get an initial overview of the ability of the instrument when used in actual field conditions. Inter-observer reliability test is applied to examine the degree of the agreement among rater. The value of  $k$  in scale 0:00 to 1:00 which in ascending order, the higher the reliability.

Extensive literature review [3-22] conducted comprises current observational tools, physical and psychosocial risk factors and epidemiological evidence with regard WWMSDs.

Initial survey conducted among 16 OSH practitioners to find out the features of a suitable observational tool and their requirements for a new assessment tool. Based on their feedbacks, the first prototype is designed covered workspace environment risk factors, musculoskeletal risk factors and psychosocial risk factors.

Prototype WMTA extended to several reviewers appointed to examine face and content validity. The reviewers consists of occupational safety and health practitioners, university lecturers with occupational safety and health background and undergraduate

student taking bachelor of occupational safety and health program. Some reviewers have extensive experience (between 10-20years) in the field of occupational safety and health. Comments from those highlighted to improve the prototype.

Pilot study was important to ensure the appropriateness of the prototype. Some sets of concerns are to identify the clarity of the items contained and get an initial overview of the ability of the instrument when used in actual field conditions. Inter-observer reliability test is applied to examine the degree of the agreement among rater. The value of  $k$  in scale 0:00 to 1:00 which in ascending order, the higher the reliability.

### **3. Development of Wmta**

Based on a survey conducted to industrial practitioners, observational tools should fit the short, quick and easy to use, can be applied in various types of work, completed within 10-20mins, comprehensive, reliable and having instruction how to use the tool. Prototype WMTA is developed with justification of the items based on previous epidemiological and laboratory studies, text books and standards related to WMSDs comprised of neck, back, shoulder&arm and legs.

#### **3.1 Neck Posture**

There is strong evidence indicates awkward posture of the neck increases risk factor of the neck disorder/shoulder [4,5]. There is evidence that sustained neck flexion increase load on the neck nerve compression and creep response in tissue [4]. Chaffin [5] distinguished that neck flexion with  $15^\circ$  affected neck muscle after 6hours working period. Ariens et al. [13] confirmed the neck flexion more than  $20^\circ$  in most of the time work increases the risk of neck pain. Meanwhile, Ng et al. [15] proved the maximum neck flexion resulted in significant muscle activity. Ohlsson et al. [12] justify critical posture of the neck at  $15^\circ$  and  $30^\circ$  flexion. Other studies [14] details neck posture more closely based on the risk rating; low-risk  $0-10^\circ$ ,  $10^\circ -20^\circ$  medium risk and high risk of more than  $20^\circ$ . Prototype WMTA postures category was defined using nine real pictures of head posture nominate the risks associated with the real task observed (figure 2).

#### **3.2 Back Posture**

Natural back posture within  $20^\circ$  bend forward [19]. Any stooped posture beyond the natural range of either bend forward, sideways or backwards at risk for back disorder. There is evidence indicates the relationship between back disorders with awkward postures [4]. Punnett et al. [21] proposed back disorder to four categories; neutral ( $<20^\circ$ ), mild ( $21-45^\circ$ ), severe ( $>45^\circ$ ) dan lateral bending and twisting ( $>20^\circ$ ). Keyserling et al. (23) proved that manual material handling (MMH) involves many side bending and twisting increased risk of low back pain. The other study [20] detailed the risk factors;  $<20^\circ$  = low risk,  $>20^\circ-45^\circ$  = moderate risk and  $\geq 45^\circ$  = high risk. Meanwhile, McAtamney and Corlett [14] classified trunk posture to three categories; ( $0-20^\circ$ ) = low risk, ( $21^\circ-60^\circ$ ) = moderate risk and ( $>60^\circ$ ) = high risk. Prototype WMTA postures category was defined using five real pictures of back posture nominate the risks associated with the real task observed (figure 2).

#### **3.3 Back movement and weight handling**

Repetitive forward bending and lifting movement substantially increased the risk of back injury [24]. Forward bending generates high bending moment on the

osteoligamentous lumbar spine [25] and tightened erector spinae. This phenomenon increases the symptom of back discomfort. Meanwhile, heavy lifting and excessive exertion/forceful movement are the main risk factor to increase LBP [4]. Forceful movement occurs when workers trying to lift or move heavy load. This phenomenon generates high compressive force to the lumbar disk and stressed out erector spinae. The risk is highly increased when lateral bending or twisting are performed simultaneously. Combination of these attributes indicates to be risk factor for low back pain [21]. In summary, repetitive movement is the main risk factor contributes to low back disorder. However, there is a limitation on how frequent is frequent affect the back. David et al. [2] detailed lifting frequency to three levels; infrequently = around 3/times/min or less. Frequently = around 8 times/min or less, very frequently = around 12 times/min or more. While the other study [14] classified it to three subjective indicators; static, repeated and shocks movement with combination with load handled. Due to uncertainty exists about load classification, prototype WMTA was followed and simplified QEC categories; below 3 times/min, 5-8 times/min, 10-12 times/min to gain more sensitivity of the scoring (figure 2).

Punnett et al. [21] suggested lifting 5kg load associated to LBP, while Ohlsson et al. [12] classified lifting more than 10kg per day generate risk to the spine. Dolan and Adam [24] discovered >100 lifts decreased muscle performance especially at L3 region by 5.5% confirming erector spinae was fatigued. Meanwhile, 23kg is a threshold given by NIOSH to define maximum acceptable weight for lifting under optimal conditions [27]. However, maximum acceptable weight given by NIOSH limited to European population with difference antropometric and physiological features compared to the Asian population. Therefore, due to obscurity exists, this standard not suitable for Malaysian population. Currently there is limitation study focuses on Asian people. Thus, prototype WMTA using subjective category of loads; below 5kg = low risk, >10kg = mild risk and >20kg = severe risk. Nevertheless, it does not conflict from other ranges have been proposed by some authors [14,16].

### **3.4 Shoulder and Arm Posture**

Working with elevated shoulder will cause shoulder disorder. Some studies [26,28] suggested posturing hands above shoulder level significantly increased the risk of localized muscle fatigue even in light weight. While Punnet et al. [29] classified shoulder natural movement at <45°, moderate risk at 46°-90° and severe risk at >90°. Arm flexion above 60° is associated with shoulder disorders [4]. Ng et al. [15] point out that side and forward arm lifting at 90° and shoulder shrugging yielded substantial muscle activity. Meanwhile, positive association between prevalence of shoulder disorders and the frequency of upper arm movement past 60° flexion and abduction [12]. Prototype WMTA postures category was defined using seven real pictures of shoulder and arm posture nominate the risks associated with the real task observed. (figure 2)

### **3.5 Shoulder and Arm Movement**

Highly repetitive shoulder/arm movement is associated with shoulder WWMSDs [4]. The other study [12] study showed there is significant positive association between the prevalence of shoulder disorder and frequency of upper arm movement greater than 60° of flexion or abduction. Shoulder movement frequencies greater than 2.5 (>2.5) per min were associated with WMSDs [16]. However, there is limited reference to determine

'safe' level of frequency that affected shoulder WMSDs. Thus, prototype WMTA proposed a three categories of shoulder and arm movement; more rest, some pause and no rest (continuous or static).

### **3.6 Leg Posture**

Not many studies have investigated WMSDs symptoms that focused on lower limbs. However, working in a squatting and kneeling affected directly to the leg and indirectly to the lower back. Basically, leg postures can be classified as knee-flexed and kneeling. Chung et al. [35] reported that severely knee-flexed posture with knee flexion of 60°, while mildly knee-flexed posture with knee flexion of 30°. In the other study [32,33] focused on kneeling posture. Kneeling with full flexion (0°) or deep flexed-leg yielded very discomfort condition, while kneeling flexion with 90° is discomfort. Hignett and McAtamney [30] proposed mild risk at 30° to 60° flexion and >60° is severe risk. In the prototype WMTA, kneeling posture with 90° is more focused. There were two conditions; kneeling with one leg or both legs. WMTA postures category was defined using five real pictures of leg posture nominate the risks associated with the real task observed. (figure 2).

### **3.7 Scoring Chart**

Scoring chart is extensively used in observational tools [4,8,14,18,22,30]. Prototype WMTA proposed scoring chart to estimate and prioritize the risk outcomes. Previous studies suggests that the risk factors should be considered in combination with each other [2,36].

Combination of overall impact is greater than the sum of the separate effect [2]. Thus, sum of the score then refers to the main scoring chart with three risk categories; low (<10), medium (11-21) and high (22-32). Each risk category accompanied with general action required to reduce the risk; Low: Task or job is acceptable or need to investigate for critical individual posture if any, Medium: Task or job need to further investigate and change soon, High: Task or job is not accepted and need to change immediately.

### **3.8 Face Validity**

In order to check initial stage of validity, assessment of face validity was performed. First draft was distributed to 11 reviewers with different backgrounds ranging from OSH practitioners, lecturers and OSH students. It is important to obtain feedback on how a draft seems in the eyes of various parties inclusive for those without strong ergonomics background. A total of six themes are identified and taking into account to improve the draft.

### **3.9 Inter-rater Reliability**

The aims of reliability study was to determine the level of agreement between observers. Three assessors were appointed consists of two occupational safety and health (OSH) practitioners and researcher himself. The assessors should observe seven tasks available in the book printing factory and conduct evaluation using WMTA. The reason why direct observation is employed because to obtain the WMTA effectiveness without using aids such as camera. Each task is labeled as; Task1 'Packing1', Task2 'Packing2', Task3 'Packing3', Task4 'Packing4', Task5 'Packing5', Task6 'Packing6', Task7 'Packing7'. Most of the work on the premise involves packing a books and magazines. Percentage of agreement calculates for neck, back, shoulders & arms and legs. Intraclass Correlation (ICC) calculates agreements between 3 or more rankers as

they rank a number of subjects according to a particular characteristics. ICC with two-way fixed analysis of consistent agreement for each observer and average value were reported.

#### 4. WMTA Validation

The aims of validity study was to establish wherether WMTA is provided good indication of WMSDs. This step involved assessment of association between postural and musculoskeletal discomfort in relevant body region. A total 40 manufacturing workers involved in this study. Each job was observed using WMTA. During the resting time, structured interview was conducted to gather body discomfort experienced by the workers. Body discomfort chart (31) was used for this purpose with some modification to fit the research setting. The chart consists of survey of body region which contains upper and lower extremities. The workers need to circle or mark the area of body that experience discomfort or pain. Chi square ( $\chi^2$ ) is used to measure the association of body discomfort/pain and WMTA scores.

#### 5. Results

##### 5.1 Face validity

A total of 4 themes were collected to develop an initial prototype WMTA. Response from OSH Practitioners ( $n = 16$ ) were stated in Table 1 (a). OSH practitioners argued that observational tools used on site should be user friendly especially for industrial workers but still retain its scientific based. Employees participation was more important than just the individual observations. They also expressed theirs view that involvement of workers together in the process of hazard identification and risk analysis in accordance the concept of self-regulation and safety culture. In addition, the use of simple language without engaging technical terms is better as well as with appropriate diagrams. As mention previous, it is important to obtain feedback on how a draft seems in the eyes of various parties inclusive for those without strong ergonomics background. Output from the reviewers ( $n = 11$ ) summarized in Table 1 (b). The responses from various reviewers were used for improvements made by taking into account the factors mentioned. Then, second draft of WMTA was proposed consists of four sections of postural analysis (neck, back, shoulder&arms and legs) and associated risk factors; movement, load, vibration, workspace and basic environmental factors (lighting, noise, odourless, heat and slippery floor).

**Table 1:** (a) OSH Practitioner survey and (b) face validity

(a) OSH Practitioner survey ( $n = 16$ )	(b) Face validity ( $n = 11$ )
--	--------------------------------

	Avoid technical words and mathematical symbols
Simple and ease to handle	Postural angle difficult to observe
Scientific based	Suggested real human pictures (instead of schematic drawing)
Involvement of workers	
Ease language and more pictorial based	Leg posture difficult to understand Observation items to many (reduce to one sheet only) Difficult to assume material weight.

### 5.2 Inter-rater reliability

The result of Phase 1 trials for inter-rater reliability are shown in table 2. According to Landis and Koch [34], range between 1.0-0.81 were considered ‘almost perfect’, 0.80-0.61 ‘substantial’, 0.60-0.41 ‘moderate’, 0.40-0.21 ‘fair’ and 0<0.20 ‘slight’. Thus, ETA demonstrate almost perfect agreement among rater with  $k = 0.84$ .

**Table 2:** Inter-rater reliability result

	Percentage (%) of agreement (n=3)							ICC	Average ICC (k)
	Task1	Task2	Task3	Task4	Task5	Task6	Task7		
Neck	100	66	100	66	66	66	100	0.75	
Back	66	100	66	100	100	100	66	0.70	
Shoulder	100	100	100	100	66	100	66	0.91	0.84
Legs	66	100	100	100	66	100	100	0.87	

### 5.3 WMTA validation

The relationship of the individual WMTA body part scores to the pain or discomfort is statistically significant for the back and legs regions. The back score for WMTA body part was  $>4$  in 85% of workers, while neck pain or discomfort was reported 90% indicated that significant association between WMTA and self-reported pain or discomfort ( $\chi^2 = 5.56$ ,  $p<0.00$ ). The shoulder and arms score for WMTA body part was  $>4$  in 90% of workers, while neck pain or discomfort was reported 83% yielding a significant association between WMTA and self-reported pain or discomfort ( $\chi^2 = 8.06$ ,  $p<0.04$ ). The knee and legs score for WMTA body part was  $>4$  in 73% of workers, while knee and legs pain or discomfort was 63% showing a significant association between WMTA and self-reported pain or discomfort ( $\chi^2 = 4.42$ ,  $p<0.04$ ). However, the score of the neck did not demonstrate significant relationship between WMTA and self-reported pain and discomfort ( $\chi^2 = 5.56$ ,  $p <0.06$ ). Table 3 summarizes chi square statistical analysis for WMTA scores and reported pain or discomfort.

**Table 3:** Chi square statistical analysis for WMTA scores and reported pain or discomfort

Body part	Pain	WMTA score		$\chi^2$	p<0.05
		1 -3	>4		
Neck	No	10	13	5.56	0.06
	Yes	2	15		
Back	No	4	0	28.89	0.00*
	Yes	2	34		
Shoulder and arms	No	2	5	8.06	0.04*
	Yes	2	31		
Knee and legs	No	7	8	4.42	0.04*
	Yes	4	21		

## 6. Discussions

WMTA development aims for the use of industrial practitioners with the involvement of workers. It is simple, precise and rapid to use, are suitable for application especially on the field. The practitioner should observe WMSDs risk against workers by completing WMTA observational tool. Employee role comes when dedicated observer requesting their feedback on body parts and basic work environment condition and suggestion to encounter the problem. WMTA development comprises survey among OSH practitioners regarding specific features observational tool, extensive literature reviews to justify specific items, draft development and validation process. WMTA emphasizes on the concept of participatory ergonomics which required workers together which OSH practitioner in the hazard identification and risk control activities.

Main postural items comprised neck, back, shoulders & arms and legs. Based on the literature discussion, the parts of the body as stated directly involved in manual material handling (MMH) jobs. The uniqueness of WMTA, it is employs real pictures postures which enables user to make a comparison of subject observed with WMTA items. In addition, technical terms and mathematical symbols be avoided to minimize disruption among users who less or are not proficient in the technical and mathematical knowledge. It is important in order to attract interest of people to participate in the hazard identification and risk control activities. While this, interaction between observer (OSH practitioner) and worker occurred. Interview among the subject will clarify any issues being overlooked in the observational tool. WMTA provided more sensitive assessment involving some combination of risks. It is not rigid and limited for certain static activity but could be implemented for more dynamic activity. WMTA advantage of not using the camera could prevent Hawthorne effect among workers. In the reliability and validity point of views, WMTA demonstrate almost perfect agreement among raters' shows that this tool that can be used as a measurement

technique on the field. All tasks were consistently obtained good agreement between assessors which is shoulder shows the highest, followed by legs, neck and back. While there is significant correlation between WMTA score and self-reported pain or discomfort in the back, shoulder & knee & arms and legs with p value <0.05. However, only the neck alone did not show a significant relationship between the two variables. This occurs because there were constraints on field observations, particularly for the neck posture. In addition, movement of the neck inconsistently complicate the situation.

## **7. Conclusions**

Designed WMTA observational tool in comparison to other observational tools has the following advantages: A main advantage it embraces the concept of participatory ergonomics and self-regulations (as mentioned in OSHA 1994) that is suitable for industrial developing country (IDC) particularly Malaysia in this context. WMTA can be applied for dynamic work tasks instead of static. In term of sensitivity, WMTA promotes combination of risks potentially which causes WMSDs. In addition, it applies the real postural photos to facilitate the less experienced individuals and demonstrate versatile condition for dynamic activity. WMTA is clear, precise and simple that hopefully will help untrained individual cultivate good safety culture and behavior.

## **8. ACKNOWLEDGMENTS**

We would like to thank all subjects who volunteered to participate in this study. The authors declare that there is no conflict of interest. We also would like to express greatest appreciation and gratitude to the Faculty of Biomedical and Health Sciences, Universiti Selangor (UNISEL) for the facilities assistance.

## 9. References.

- [1] PERKESO, Laporan tahunan. Statistik kemalangan dan kecederaan, Pertubuhan Keselamatan Sosial (In malay language). (2013)
- [2] G.W. David, G. Li, P. Buckle, The development of the Quick Exposure Check (QEC) for assessing exposure to risk factors for work-related musculoskeletal disorders, *Applied Ergonomics*. 39 (2008) 57–69.
- [3] G.W. David, Ergonomic methods for assessing exposure to risk factors for work-related musculoskeletal disorders, *Occupational Medicine*. 55 (2005) 190-199.
- [4] B.P. Bernard, (Ed.), Musculoskeletal disorders and workplace factors. A critical review of epidemiologic evidence for work-related musculoskeletal disorders of the neck, upper extremity, and low back. National Institute for Occupational Safety and Health (NIOSH), Cincinnati, OH. (1997).
- [5] D.B. Chaffin, Localized Muscle Fatigue - Definition and Measurement, *Journal of Occupational and Environmental Medicine*, 15(4) (1973) 346-354.
- [6] W.B. Keyserling, B. Silverstein, A checklist for evaluating ergonomic risk factors resulting from awkward postures of the legs, trunk and neck, *International Journal of Ergonomics*. 9 (1992) 283-301.
- [7] G.P.Y. Szeto, L. Straker, S. Raine, Field comparison of neck and shoulder postures in symptomatic and asymptomatic office workers, *Applied Ergonomics*. 33 (2002) 75–84.
- [8] M. Sonne, D. Villalta, D. Andrews, Development and evaluation of an office ergonomic risk checklist: ROSA - Rapid office strain assessment, *Applied Ergonomics*. 43 (2012) 98-108.
- [9] D.B. Lowe, S.J. Wurzelbacher, S.A. Shulman, S.D. Hudock, Electromyographic and discomfort analysis of confined-space shipyard welding processes, *Applied Ergonomics*, 32 (2001) 255-269.
- [10] B.L. Braun, L.R. Amundson, Quantitative assessment of head and shoulder posture, *Arch Phys Med Rehabil.* 70(4) (1989) 322-9.
- [11] W.P. Hanten, R.M. Lucio, J.L. Russell, D. Brunt, Assessment of total head excursion and resting head posture, *Arch Phys Med Rehabil.* 72(11) (1991) 877-80.
- [12] K. Ohlsson, R.G. Attewell, B. Palsson, B. Karlsson, I. Balogh, B. Johnsson, A. Ahlm, S. Skerfving, Repetitive industrial work and neck and upper limb disorders in females, *Am J Ind Med.* 27(5) (1995) 731-47.
- [13] G. Ariens, P. Bongers, M. Douwes, M. Miedema, W. Hoogendoorn, G. van der Wal, L. Bouter, W. van Mechelen, Are neck flexion, neck rotation, and sitting at work risk factors for neck pain? Results of a prospective cohort study, *Occup. Environ Med.* 58(3) (2001) 200–207.
- [14] L. McAtamney, N. Corlett, RULA: a survey method for the investigation of work-related upper limb disorders, *Applied Ergonomics*. 24(2) (1993) 91-99.

- [15] D.Ng, C. McNee, J. Kieser, M. Farella, Neck and shoulder muscle activity during standardized work-related postural tasks, *Applied Ergonomics*. xxx (2013) 1-8.
- [16] A. Kilbom, Repetitive work of the upper extremity: Part I-Guidelines for the practitioner, *International Journal of Industrial Ergonomics*. 14 (1994) 51-57.
- [17] R. Ketola, R. IV. Toivonen, II. E. Viikari-Juntura, Interobserver repeatability and validity of an observation method to assess physical loads imposed on the upper extremities, *Ergonomics*. 44(2) (2001) 119-131.
- [18] O. Karhu, P. Kansi, I. Kuorinka, Correcting working postures in industry: A practical method for analysis, *Applied Ergonomics*. 8(4) (1977) 199-201.
- [19] S.A. Aaras, The impact of ergonomic intervention on individual health and corporate prosperity in a telecommunications environment, *Ergonomics*. 37(10) (1994) 1679-1696.
- [20] V. Paquet, L. Punnett, B. Buchholz, Validity of fixed-interval observations for postural assessment in construction work, *Applied Ergonomics*. 32 (2001) 215-224.
- [21] L. Punnett, L.J. Fine, W.M. Keyserling, G.D. Herrin, D.B. Chaffin, Back disorders and nonneutral trunk postures of automobile assembly workers, *Scand J Work Environ Health*. 17(5) (1991) 337-346.
- [22] A. Zunjic, D. Milanovic, L.J. Milanovic, M. Misita, P. Lukic, Development of a tool for assessment of VDT workplaces - A case study, *International Journal of Industrial Ergonomics*. 42 (2012) 581-591.
- [23] W.M. Keyserling, L. Punnett, J.L. Fine, Trunk Posture and Back Pain: Identification and Control of Occupational Risk Factors, *Applied Industrial Hygiene*. 3(3) (1988) 87-92.
- [24] A. Dolan, M.A. Adams, Repetitive lifting task fatigue the back muscles and increase the bending moment acting on the lumbar spine, *Journal of Biomechanics*. 31 (1998) 713-721.
- [25] M.A. Adams, P. Dolan, A technique for quantifying bending moment acting on the lumbar spine in vivo, *Journal of Biomechanics*. 24 (1991) 117-126.
- [26] D.B. Chaffin, K.S. Park, A longitudinal study of low-back pain as associated with occupational weight lifting factors, *Am Ind Hyg Assoc J*. 34(12) (1973) 513-25.
- [27] T.R. Waters, V. Putz-Anderson, A. Garg, L.J. Fine, Revised NIOSH equation for the design and evaluation of manual lifting tasks, *Ergonomics*. 36(7) (1993) 749-776.
- [28] F.S. Wiker, D.B. Chaffin, G.D. Langolf, Shoulder Postural Fatigue And Discomfort, Preliminary Finding of No Relationship with Isometric Strength Capability in a Light Weight Manual Assembly Task, *International Journal of Industrial Ergonomics*. 5 (1990) 133-146.
- [29] L. Punnett, L.J. Fine, W.M. Keyserling, G.D. Herrin, D.B. Chaffin, Shoulder disorders and postural stress in automobile assembly work, *Scand J Work Environ Health*. 26(4) (2000) 283-291.
- [30] S. Hignett, L. McAtamney, Rapid Entire Body Assessment (REBA), *Applied Ergonomics*. 31 (2000) 201-205.

- [31] E.N. Corlett, R.P. Bishop, A Technique for Assessing Postural Discomfort, *Ergonomics*. 19(2) (1976) 175-182.
- [32] M.K. Chung, I. Lee, Y.S. Yeo, Physiological workload evaluation of screw driving tasks in automobile assembly jobs, *International Journal of Industrial Ergonomics*. 28 (2001) 181-188.
- [33] S. Gallagher, J. Pollard, W.L. Porter, Electromyography of the thigh muscles during lifting tasks in kneeling and squatting postures, *Ergonomics*. 54(1) (2011) 91-102.
- [34] J. R. Landis and G.G. Koch, The Measurement of Observer Agreement for Categorical Data, *Biometrics*. 33 (1977) 159-174.
- [35] M.K. Chung, I. Lee, D. Kee, Assessment of postural load for lower limb postures based on perceived discomfort, *International Journal of Industrial Ergonomics*. 31 (2003) 17-22.
- [36] W.S. Marras, S.A. Lavender, S.E. Leurgans, F.A. Fathallah, Biomechanical risk factors for occupationally related low back disorders, *Ergonomics*. 38 (1995) 377-410.

## APPENDICES

Fig. 2. Prototype Works Movement Task Analysis (WMTA) tool.

									<b>Movement?</b> <input type="checkbox"/> 1 More rest <input type="checkbox"/> 2 Some pause <input type="checkbox"/> 3 No rest/prolonged		
									<b>NECK</b>		
					<b>Movement?</b> <input type="checkbox"/> 1 below 3x per minute <input type="checkbox"/> 2 5-8x per minute <input type="checkbox"/> 3 10-12x per minute			<b>Lifting/carrying loads?</b> <input type="checkbox"/> 1 Light (<5kg) <input type="checkbox"/> 2 Moderate (>10kg) <input type="checkbox"/> 3 Heavy (>20kg)			
					<b>BACK</b>						
					<b>Movement?</b> <input type="checkbox"/> 1 More rest <input type="checkbox"/> 2 Some pause <input type="checkbox"/> 3 No rest/prolonged			<b>Lifting/carrying loads?</b> <input type="checkbox"/> 1 Light (<5kg) <input type="checkbox"/> 2 Moderate (>10kg) <input type="checkbox"/> 3 Heavy (>20kg)			
					<b>Load stable?</b> <input type="checkbox"/> 1 Yes <input type="checkbox"/> 2 No			<b>SHOULDER &amp; ARMS</b>			
					<b>Movement?</b> <input type="checkbox"/> 1 More rest <input type="checkbox"/> 2 Some pause <input type="checkbox"/> 3 No rest/prolonged						
					<b>KNEE &amp; LEGS</b>						
<b>Coupling?</b> <input type="checkbox"/> 1 Smooth/rounded shape <input type="checkbox"/> 2 Hard/hard edge <input type="checkbox"/> 3 No coupling		<b>Hand protection (gloves)?</b> <input type="checkbox"/> 1 Yes/suitable <input type="checkbox"/> 2 No/not suitable		<b>Overall task/job tempo?</b> <input type="checkbox"/> 1 Very slow <input type="checkbox"/> 2 Acceptable <input type="checkbox"/> 3 Very fast		<b>Chair/sitting condition?</b> <input type="checkbox"/> 1 Necessary back support <input type="checkbox"/> 2 No/not suitable back support		<b>Environmental factors?</b> Low light/Noise/Odor/Heat/Slippery floor (+1 if 1 risk; +2 if >2 risks present)			

Fig. 3. Scoring chart with process

